



VNA TEST LEAD

REVISION			
REV.	DESCRIPTON	DATE	APPROVED
-	INITIAL RELEASE	05/05/98"	
A	REVISE NOTE	10/23/98"	
B	修改註記和標籤內容	02/03/99"	

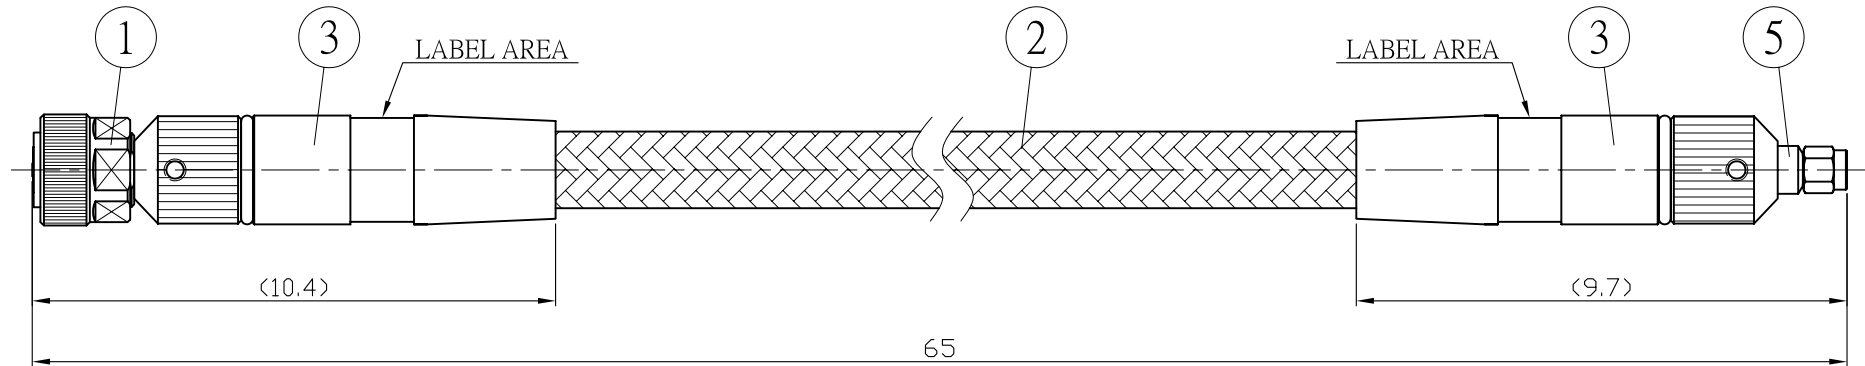

NOTES:

1. MAX RETURN LOSS (S11) UP TO 18GHz: $\leq -20\text{dB}$.
2. VERY FLEXIBLE RUGGEDIZED CABLE (WITH STAINLESS ARMOUR + NYLON BRAID).
3. PHASE STABILITY VERSUS FLEXURE (CABLE WRAPPED AROUND A 5CM DIAMETER MANDREL):
10GHz $\pm 2^\circ$; 18GHz $\pm 4^\circ$.
4. WW/YY=DATE CODE; XXXX=UNIQUE SERIAL NUMBER.
印字內容: WW/YY-XXXX (WW=第幾週; YY=西元年; XXXX=流水號)
每批流水編號都是從0001開始; 流水號由0001、0002、0003.....依此類推.
5. S11, S21 & PHASE TEST REPORT WILL BE SEND ALONG WITH EACH ASSEMBLY.
每條組線需隨貨附 S11, S21, PHASE 測試報告, 並留存電子檔案.

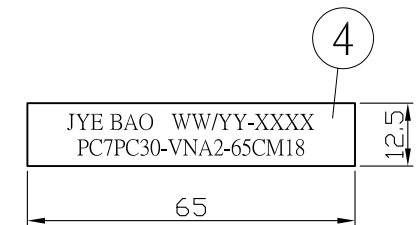

LABEL (UNIT: MM)

裁線長度: 621.0 MM

DINENSION ARE MILLIMETERS UNLESS OTHERWISE SPECIFIED TOLERANCES (UNIT:MM)					STANDARD	REV B	UNIT CM	JYE BAO CO., LTD. TAIPEI TAIWAN	
5	PC3.5-3200S-VNA2	PC3.5 PLUG	1	EA	10~30 = ± 1.5 30~200 = ± 10 200~1000 = ± 25 1000~ = ± 35	APPEROVE	DATE	DESCRIPTION PC7 TO PC3.5 PLUG 18GHz VNA CABLE	
4	LABEL	LABEL	2	EA		CHECKED	DATE		
3	VNA	CLAMP	2	EA		DRAWN Albert	DATE	CUSTOMER DRAWING NO.	JYE BAO DRAWING NO.
2	VNA2	CABLE	2.037	FT				PC7PC30-VNA2-65CM18	PC7PC30-VNA2-65CM18
1	PC7-VNA2	PC7	1	EA					
NO.	PARTS NO.	DESCRIPTION	Q'TY	U/M					